LagLens: Seeing What a Robot Actually Executes When Its Policy Thinks Too Slowly

Theme: VIS + AI · **Live demo:** https://joowan1108.github.io/laglens/ · **Source:** github.com/joowan1108/laglens (`src/`; run locally: `python3 -m http.server 8000 --directory src`)

Modern robot policies (neural networks that map camera images, and for vision-language-action models also a text instruction, to motor commands) predict a **chunk** of future actions from one observation and execute its first *h* actions **open-loop**, i.e. without looking at the scene again (*h* = execution horizon). Because inference takes time *d* (latency), the robot either **waits** (synchronous) or keeps executing an old chunk and switches when a new one arrives (**asynchronous**). Researchers tune the strategy, the latency budget and the execution horizon from aggregate success curves. LagLens replays one pretrained policy from the **same 50 initial states** under **46 execution schedules** (plus a noise replicate), logs every predicted chunk, and links four d3.js views so that an analyst can go from "which schedule is robust?" down to "which chunk hand-over pushed the block away?".

1 · What: Data Abstraction

Source. We generated the data ourselves (no public dataset logs per-inference chunks). In the simulated **PushT** task, a round pusher (the *agent*, seen from above) must push a T-shaped block onto a fixed T-shaped goal. The pretrained `lerobot/diffusion_pusht` Diffusion Policy [2] turns the last 2 camera frames into a chunk of 16 actions (2-D target positions of the agent) by iteratively removing noise from a random start (10 DDIM denoising steps, CPU, 10 Hz: 1 step = 100 ms); since every chunk starts from random noise, outcomes are stochastic. A **schedule** = strategy × latency *d* × execution horizon *h*: **sync** (hold still for *d* steps, then execute *h* actions), **naive async** (keep executing the old chunk while inference runs, switch after *d* steps and skip the *d* outdated actions), and **inpaint async** (as naive, but the new chunk is generated with the already committed actions held fixed and the old plan softly blended in over the overlap; a training-free approximation of Real-Time Chunking [8]). Async schedules with *d* = 0 equal sync *d* = 0, and *d* > *h* is infeasible (two inferences would overlap), giving 46 schedules. A **replicate** of sync *d*0 *h*8 with different sampling noise measures chance flips.

Dataset type: a multidimensional **table** of episodes (2,350 items × 19 attributes, 215 KB), each linked to two **temporal** tables, steps (598,117 items) and chunks (119,373 items, each with 16 predicted 2-D actions), and to a 2-D **spatial** field (512 × 512 px workspace); 112 MB of JSON lazy-loaded per schedule. **Keys:** strategy, latency, horizon, replicate (→ schedule), seed (→ episode), t (→ step), chunk id (→ chunk). Everything else is a value.

Attribute	Type, order	Levels / range	Meaning	Attribute	Type, order	Range	Meaning
strategy KEY	nominal	sync, naive, inpaint	chunk replacement rule	coverage_final	ratio ↑	0.00–0.99	T-block/goal overlap
latency d KEY	ordinal (ratio)	0<1<2<4<6 steps	inference delay	steps_to_success	ratio ↓	68–300 (null if failed)	time to finish
horizon h KEY	ordinal (ratio)	2<4<6<8 steps	open-loop actions per chunk	seam_gap_mean / max	ratio (px) ↓	2.3–222.2 / 6–305	boundary discontinuity (jump at hand-over)
replicate KEY	nominal (binary)	0, 1	noise re-run	staleness_mean	ratio (steps) ↓	0.5–9.5	age of the observation behind each action
seed KEY	nominal	1000–1049 (50)	paired initial state	idle_frac	ratio ↓	0.00–0.75	share of steps without action
success	nominal (binary)	0, 1	coverage ≥ 95 % in 300 steps	jerk · path_len · n_inferences · n_seams · inner_step	ratio	1.2–221.3 · 205–12828 · 8–150 · …	smoothness (2nd difference) · distance · # chunks · # hand-overs · step size inside a chunk

Derived metrics. *Chunk-boundary discontinuity* (columns `seam_gap_*`; the position gap at chunk transitions studied in [8,11,12]): at every hand-over from chunk *k* to *k*+1, the distance between the first action executed from *k*+1 and the action *k* had planned next. *Staleness*: steps between the observation a chunk was planned from and the execution of each of its actions. Step values: agent/block x, y (interval, px), block θ (cyclic), action x, y, chunk id, index j (0–15), age (steps since its observation), held (1 = idle step), coverage.

2 · Who: Personas



Mara Jensen · primary · 28 · PhD student, robot learning lab, Copenhagen

Goals/needs: choose strategy and horizon for a real arm whose GPU server is 60–250 ms away; explain *why* episodes fail, with per-episode evidence aligned with what the policy planned.

Pain points: only success tables and videos; cannot tell stale actions from discontinuities; real-robot reruns are expensive.



Arjun Mehta · secondary · 37 · ML platform engineer, robotics start-up, Seoul

Goals/needs: set a latency budget and a default strategy for the async serving stack; know whether a drop is real or a few lucky seeds.

Pain points: papers report curves for other robots; no shared vocabulary with researchers. **Difference:** systems vs. policy expertise; aggregate (T1, T2) vs. episode-level (T3, T4) questions.

Portraits: public-domain StyleGAN images (Wikimedia Commons); the people do not exist.

3 · Why: Task Abstraction

#	Action → target	Why	Expected outcome
T1	**Compare → trends** of success / boundary discontinuity / staleness / idle across schedules	pick a schedule for the latency the lab actually has	robust region and a latency budget per strategy
T2	**Locate → outliers**: initial states whose outcome flips between reference R and candidate C	aggregate rates hide which situations break; paired seeds isolate the schedule effect	a set of fragile seeds; flips separated from chance
T3	**Identify → features** in time and space: where stale actions, discontinuities and idling occur in a flipped episode	diagnose the failure mechanism, not just its rate	a causal hypothesis tied to specific chunks
T4	**Discover → correlation** between boundary discontinuities and task outcome over paired episodes	test the claim that failures come with larger chunk-boundary artifacts [12]	evidence for or against a strategy, per seed

4 · How: Vis Idiom Design

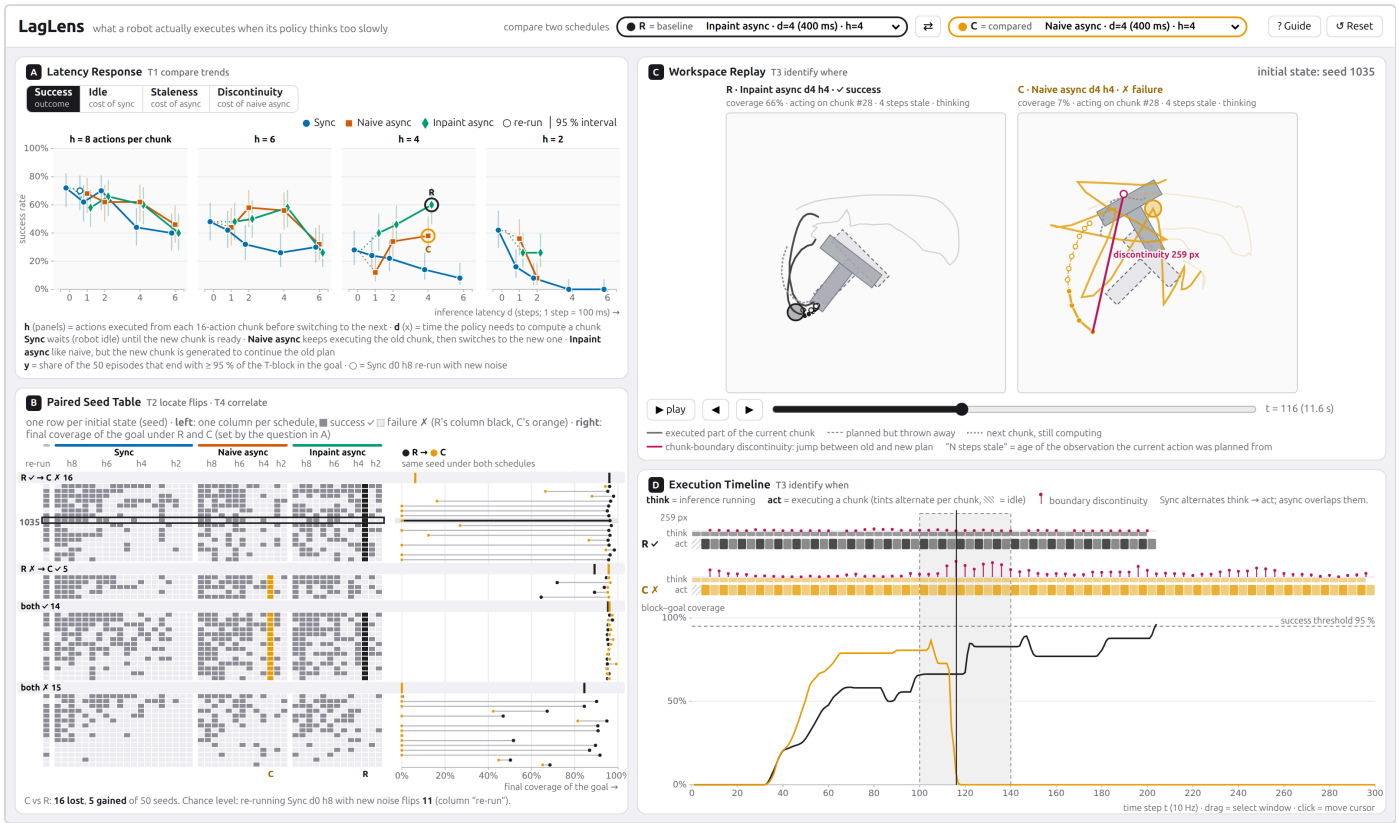


Figure 1. LagLens (live: R = inpaint async d4 h4, C = naive async d4 h4, seed 1035, window t = 100–140). **A** Latency Response, **B** Paired Seed Table, **C** Workspace Replay, **D** Execution Timeline. All views share one R/C pair, one seed and one seed selection.

Design goal: make the cost of each strategy visible. Sync pays with **time** (the robot idles while the policy thinks: idle share ≈ $d/(h+d)$, 51 % at $d4$ $h4$), naive async with **discontinuity** (no idling, but the new chunk can pick another *mode*, i.e. another way of pushing: mean discontinuity 43.5 px at $d4$ $h4$), inpaint async only with **staleness** (same timing, discontinuity 8.0 px). Each cost has one signature: A's "mechanism" metrics, D's think/act tracks (alternating vs. overlapping) and discontinuity lollipops, C's magenta discontinuity segment. A first version (5 views, ~10 hues, numbers in every heatmap cell) was judged cluttered; we redesigned it with the VIS literature below (full rationale: `docs/design_rationale.md`).

View (task)	Idiom, marks & channels — why	Interaction
A Latency Response (T1)	Line-chart small multiples, one panel per horizon *h* (shared y); x = latency *d* on its true scale, y = metric (*position on a common scale*, the most accurate magnitude channel [16,17]); strategies **superposed** for direct sync-vs-async comparison, hue + redundant shape [18]. Thin 95 % intervals (Wilson / t) instead of bars [19]; hover gives the **paired** difference to R.	click = C, shift-click = R; **one question bar** (Success · Idle = cost of sync · Staleness = age of the picture · Discontinuity = cost of naive async) sets A's y *and* B's dumbbells; legend hover; **recomputes on the seeds selected in B**.
B Paired Seed Table (T2, T4)	Composite, Table-Lens-like view [20]: one row per seed shared by an **outcome matrix** (filled = success; R's column black, C's orange; columns grouped by strategy) and **dumbbells** R → C of the attribute that belongs to A's question (position, symlog for discontinuities). Rows grouped by R→C change (*spatial region*), robust seeds first, so flips break their band; a **re-run** column gives the chance level; band ticks = medians.	no controls of its own; click header = C; click cell = open episode; **brush** dumbbells or click a band = select seeds (cross-filters A [21], dims rows).
C Workspace Replay (T3)	Juxtaposed R | C maps at equal scale (true geometry) [18]. Only the current chunk (filled = executed, hollow dashed = thrown away), the chunk still being computed (dotted grey) and the latest discontinuity (magenta segment, length = gap); status line in strategy terms ("idle: waiting for inference").	play / scrub / keys; hover a planned point = when planned and executed; click = jump; D's window highlights the path.
D Execution Timeline (T3)	Gantt lanes on a shared time axis [22]: per run a **think** track (inference intervals) and an **act** track (chunk spans, alternating tints, hatched = idle); discontinuities as **lollipops** (length on a common baseline); coverage lines with the 95 % threshold.	**brush** a window (→ C), hover a chunk (→ its plan in C), click = cursor.

Hue has one meaning per view family: R near-black, C orange (identity); sync blue, naive vermillion, inpaint green (strategy, with ●■◆); magenta = discontinuity; all else grey. CVD-checked with Machado et al.'s simulation (R/C $\Delta E_{OK} \geq 48$). Following the rules of parsimony and consistency [23], the former flip matrix and seed-shift plot became one view, and our own walkthrough showed that ten controls with technical names (Δ mode, sort orders, an 8-item attribute list, playback speed) were hard to understand, so they were reduced to the R/C pair and one four-button question bar named after who pays each cost. Every term and encoding is also defined in place (R = baseline, C = compared in the header; key lines for *h*, *d*, strategies, cells and tracks under each view), so the guide is not needed to decode the views. **Sketch → implementation:** the sketch (Fig. 2) shows the redesigned layout and is implemented as drawn.

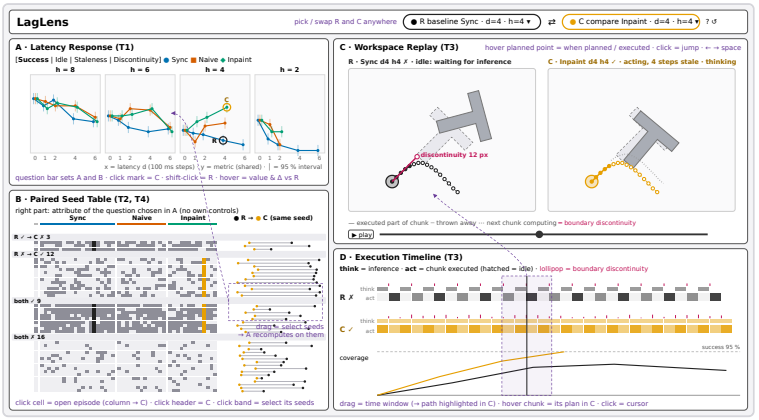


Figure 2. Sketch (purple = interaction and linking).

5 · Implementation

- **Interface** (`src/`): plain ES modules + **d3.js v7.9.0 only** (bundled, no other charting library). One shared state object with a `d3.dispatch` bus; each view re-renders only for the state keys it depends on. Per-schedule logs (≤ 5.3 MB) are fetched lazily and indexed once (executed index set per chunk), so scrubbing and hovering stay interactive. URL parameters reproduce any view state (used for every figure here).
- **Data pipeline** (`scripts/`): `generate_rollouts.py` runs all seeds of a schedule in lockstep so that one batched diffusion call serves all 50 environments (CPU, ≈ 2–10 min per schedule); `build_dataset.py` derives metrics; `verify_dataset.py` checks the ≥ 100 items / ≥ 6 attributes requirement.
- **Testing**: `ui_test.py` loads the app in headless Chromium, runs 32 interaction checks across all views, and fails on any console error (all pass, 0 errors). Two generator bugs found during analysis (an off-by-one inpainting mask and a dropped chunk when *d* = *h*) were fixed and the affected data regenerated.

6 · Case Study: Mara chooses an execution schedule for 400 ms of latency

Mara's server adds ≈ 400 ms (*d* = 4). She opens LagLens with R = sync *d*0 *h*8, the policy's default.

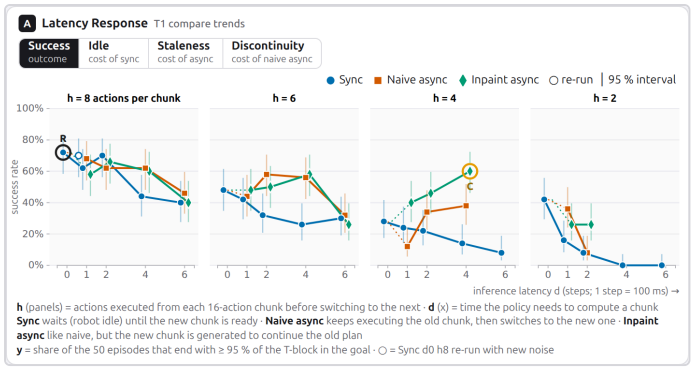


Figure 3. A: success rate vs. latency per horizon (C = inpaint d4 h4).

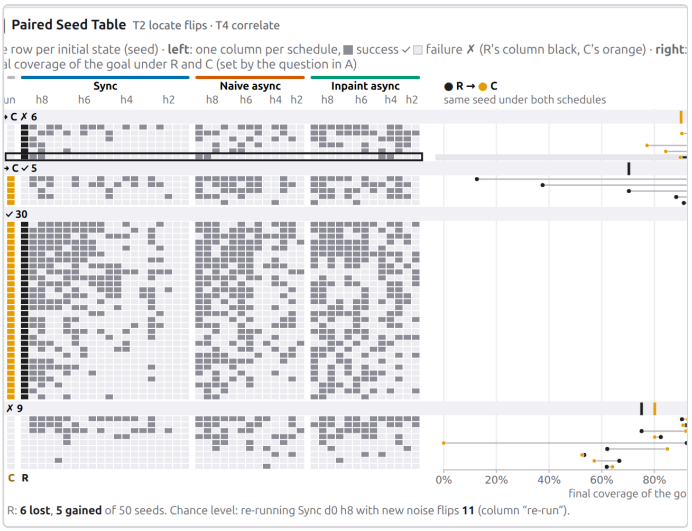


Figure 4. B with C = noise re-run, rows grouped by R→C change (top shown).

Finding 1 (T1): at 400 ms, inpainting is the only strategy that stays flat across horizons. In A (Fig. 3) no point lies above the zero-latency baseline (sync *d*0 *h*8, 72 %). At *d* = 4, the blue sync curves fall in every panel, to 44 / 26 / 14 / 0 % for *h* = 8 / 6 / 4 / 2 (idle share up to 67 %), naive async to 62 / 56 / 38 %, while inpaint async holds 60 / 58 / 60 %. Pressing *Discontinuity* shows why naive degrades at short horizons: its mean discontinuity grows to 43.5 px at *d*4 *h*4 and 94.2 px at *d*2 *h*2, while inpainting stays ≤ 20.6 px everywhere. The horizon also matters without latency: sync *d*0 succeeds 72 % at *h*8 but only 28 % at *h*4, the jittery re-planning Chi et al. reported [2].

Finding 2 (T2): about one in five outcomes flips by chance, so small differences are noise. Setting C to the **noise replicate** (Fig. 4) gives 6 losses and 5 gains: 11 of 50 seeds (22 %) flip with an identical schedule. Schedules such as naive *d*1 *h*8 (9 losses / 7 gains) or sync *d*2 *h*8 (7 / 6) are therefore indistinguishable from the baseline, whereas sync *d*4 *h*8 (19 / 5) is a real loss. Within each band the most robust seeds come first and the hover reveals fragile ones: seed 1001 succeeds under R but in only 15 % of all schedules, so Mara removes such seeds from her claims.

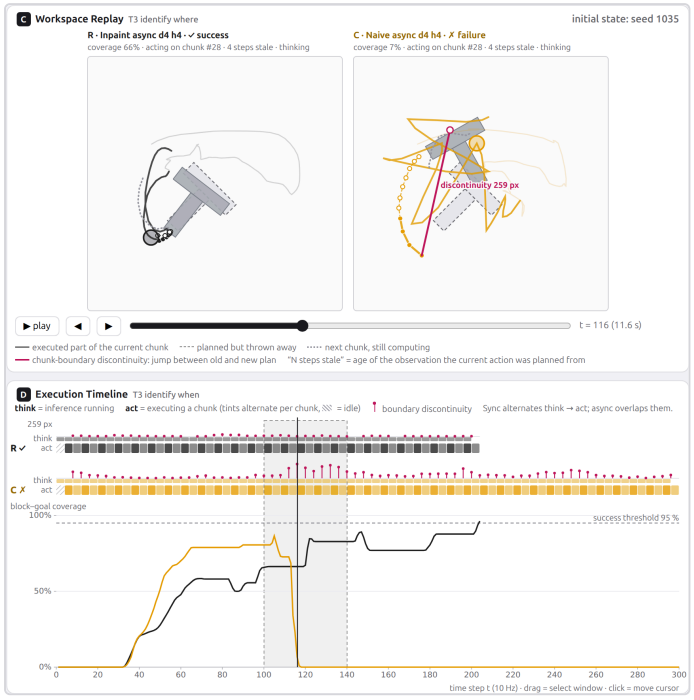


Figure 5. Seed 1035, R = inpaint d4 h4 (success), C = naive d4 h4 (failure); window t = 100–140 brushed in D, cursor at t = 116.

Finding 3 (T3): naive async fails through "mode ping-pong" at chunk discontinuities, not through staleness. For seed 1035 both schedules have the same staleness (4–7 steps), and naive async is even *ahead* until t ≈ 105 (coverage 86 % vs. 66 %). In D, C's discontinuity lollipops then explode (184 px at t = 112, 259 px at t = 116, 190–237 px afterwards), while R's stay below 21 px. Scrubbing C to t = 116 shows the cause: the old chunk (planned from the observation at t = 108) heads to the top of the block, the new chunk (planned at t = 112, after the agent had moved down) starts at the bottom and turns left. The agent swings across the T, which slides out of the goal: coverage falls from 73 % (t = 112) to 0 % (t = 118). Inpainting keeps the committed tail of the old plan, so R's fans continue the same motion and the episode finishes at t = 204.

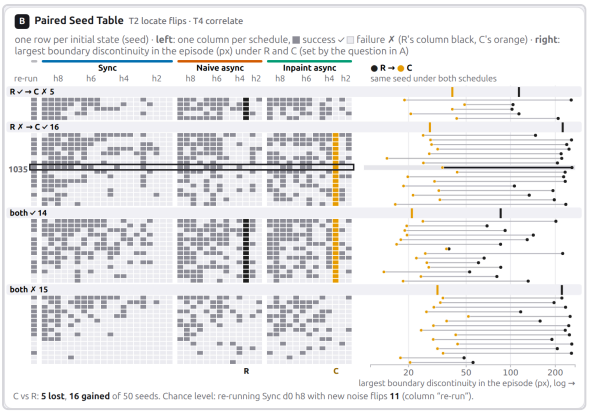


Figure 6. B with R = naive d4 h4, C = inpaint d4 h4, question "Discontinuity": largest discontinuity per episode (log axis); band ticks = medians.

Finding 4 (T4): naive-async failures come with large discontinuities; inpainting shrinks every discontinuity but not every failure. With R = naive *d*4 *h*4 and C = inpaint *d*4 *h*4, B (Fig. 6) groups the 50 seeds by outcome change. The black median ticks separate the bands: seeds that *failed* under naive async have median max discontinuities of 221–224 px, seeds that succeeded 86–114 px. All 50 dumbbells point left: inpainting lowers the largest discontinuity of *every* seed, to at most 52 px. 16 seeds are rescued and 5 lost (5 ≤ 11, within the noise floor of Finding 2). Yet 15 seeds still fail under inpainting although their discontinuities (median 32 px) are as small as in successful runs (21–28 px), so their failures need another explanation (e.g. reduced reactivity), which Mara inspects next with C/D; selecting that band re-aggregates A on those 15 seeds. Over all schedules, failed naive episodes have a median max discontinuity of 81 px vs. 50 px for successes, consistent with [12]; for inpainting 23 vs. 20 px.

Outcome. Mara proposes inpaint async with *h* = 4–8 for *d* ≈ 4, reports differences only beyond the 11-flip noise floor, and gives Arjun a latency budget: sync is acceptable only up to *d* = 2 at *h* = 8.

7 · Limitations

One simulated task and one policy; latency is quantised to 100 ms steps; the inpainting strategy is a training-free approximation of RTC; a faster 10-step denoising schedule (DDIM) replaces the original 100-step one (DDPM) for CPU feasibility (the replicate shows that this changes outcomes of individual seeds but not the 70–72 % baseline rate). With 50 seeds, success differences below ≈ 11 flips should not be interpreted.

AI Usage Disclosure

This project was built with **Claude Code (Anthropic, Claude Opus 5.5)**, directed and reviewed by the student. **Written by AI:** the literature survey and topic comparison, all data-generation and preprocessing scripts, the complete interface code in `src/` (d3.js), the tests, the proposal slides and sketch, the personas, and this report's text, figures and screenshots (produced by operating the interface through scripted states). **Human:** topic choice among AI-proposed candidates, design requests (more and richer views; later a less cluttered, literature-grounded redesign focused on sync vs. async), deployment approval, review. Numbers in the slides and this report are filled in automatically from the data files. External code, data and images are listed below and in `docs/references.md`; a dated log is in `docs/ai_disclosure.md`.

References & Credits

[1] Zhao et al. Learning Fine-Grained Bimanual Manipulation with Low-Cost Hardware (ACT). RSS 2023. arXiv:2304.13705
[2] Chi et al. Diffusion Policy: Visuomotor Policy Learning via Action Diffusion. RSS 2023. arXiv:2303.04137
[3] Black et al. π0: A Vision-Language-Action Flow Model. 2024. arXiv:2410.24164
[4] Pertsch et al. FAST: Efficient Action Tokenization for VLA Models. 2025. arXiv:2501.09747
[5] Kim, Finn, Liang. Fine-Tuning VLA Models: Optimizing Speed and Success. 2025. arXiv:2502.19645
[6] Shukor et al. SmolVLA (asynchronous inference). 2025. arXiv:2506.01844
[7] Liu et al. Bidirectional Decoding. ICLR 2025. arXiv:2408.17355
[8] Black, Galliker, Levine. Real-Time Execution of Action Chunking Flow Policies (RTC). NeurIPS 2025. arXiv:2506.07339
[9] Training-Time Action Conditioning for Efficient Real-Time Chunking. 2025. arXiv:2512.05964
[10] VLASH: Real-Time VLAs via Future-State-Aware Asynchronous Inference. 2025. arXiv:2512.01031
[11] SEAM: Smooth Execution of Action-Chunked Motion for VLA Policies. 2026. arXiv:2607.04609
[12] Noise-Space Attribution and Control of Chunk-Boundary Artifact. 2026. arXiv:2603.11642
[13] Lugmayr et al. RePaint. CVPR 2022 · Song et al. DDIM. ICLR 2021.
[14] Munzner. Visualization Analysis and Design. CRC, 2014 · Okabe & Ito colour palette.
[15] Related VIS: DQNViz (VAST 2018), DRLViz (EuroVis 2020), PolicyExplainer (arXiv:2104.02818).
[16] Cleveland, McGill. Graphical perception. JASA 1984 · [17] Heer, Bostock. Crowdsourcing graphical perception. CHI 2010.
[18] Gleicher et al. Visual comparison for information visualization. Inf. Vis. 2011 · Gleicher. Considerations for visualizing comparison. TVCG 2018.
[19] Correll, Gleicher. Error bars considered harmful. TVCG 2014 (VIS).
[20] Rao, Card. The Table Lens. CHI 1994 · Javed, Elmqvist. Composite visualization. PacificVis 2012.
[21] Weaver. Cross-filtered views for multidimensional visual analysis. TVCG 2010.
[22] Plaisant et al. LifeLines. CHI 1996 · Brehmer et al. Timelines revisited. TVCG 2017.
[23] Wang Baldonado et al. Guidelines for using multiple views. AVI 2000 · Machado et al. CVD simulation. TVCG 2009.
Software: d3.js 7.9.0 (ISC) · LeRobot 0.6.1 and the `lerobot/diffusion_pusht` checkpoint (Apache-2.0) · gym-pusht (MIT) · PyTorch (BSD) · diffusers (Apache-2.0) · Playwright (Apache-2.0).